

STILES AND RAILS WITH SOFTWOOD SUPPORT

Technical information:


Wood: Oak / softwood

Moisture: 9 ± 2%

Construction: Top and bottom layer - 2 mm thickness lamella; side strips - finger joined oak strips; middle layer - finger joined softwood support

Gluing: cold gluing D3 class glue

Finishing: unfinished

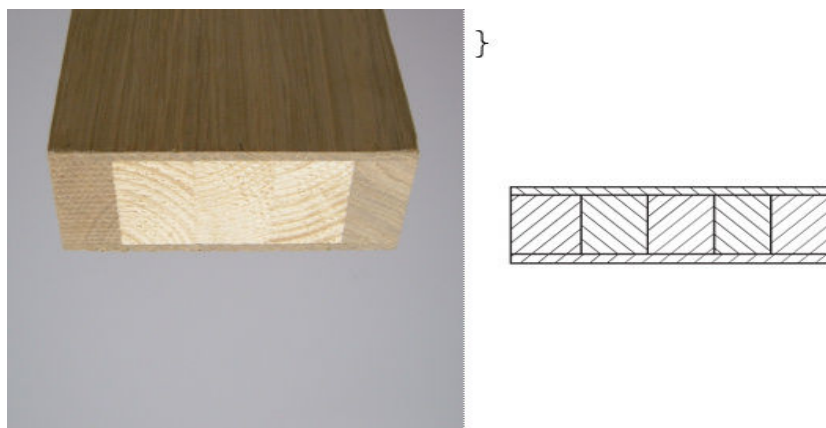

Stiles and rails for the doors

Standard measurement door stiles and rails

Product	Height, mm	Width, mm	Length, mm	Quality
ECO Stile 100	43	100	2100	A/A
ECO Stile 120	43	120	2100	A/A
ECO Rail 100	43	100	700	A/A
ECO Rail 120	43	120	700	A/A
ECO Rail 140	43	140	700	A/A
ECO Rail 165	43	165	700	A/A

Note: Other measurements are available too.

For more information please contact us: ecowood@ecowood.eu