

## REALISATIONS in REAL ESTATE PROJECTS

VANAGUPĖS PARKAS - Palanga, Lithuania. Year 2016.

[www.vanagupesparkas.lt](http://www.vanagupesparkas.lt)



2-Layer Oak Flooring. Total - 1135 m<sup>2</sup>, Width - 140 mm, Colour - Extra White (3408), Rustic Grade.

LIGHT HOUSE - Vilnius, Lithuania. Year 2015-2016.

[www.lhouse.lt](http://www.lhouse.lt)



2-Layer Oak Flooring. Total - 1500 m<sup>2</sup>, Width - 140 mm, Colourless Oil (3305), Rustic Grade.

ANTAKALNIO TERASOS - Vilnius, Lithuania. Year 2015-2016.

[www.antakalnioterasos.lt](http://www.antakalnioterasos.lt)



2-Layer Oak Flooring. Total - 2500 m<sup>2</sup>, Width - 140 mm, Colourless Oil (3305), Rustic Grade.



2-LAYER OAK FLOORING on OSB/3



# 2-LAYER OAK FLOORING on OSB/3

## ECOLOGY @ ECONOMY




**ECOWOOD UAB**  
Statybininku str. 1, LT-54222  
Vilkija, Lithuania

Phone: +370 37 55 61 33  
E-mail: [ecowood@ecowood.eu](mailto:ecowood@ecowood.eu)  
[www.ecowood.eu](http://www.ecowood.eu)



[www.ecowood.eu](http://www.ecowood.eu)

## CONSTRUCTION

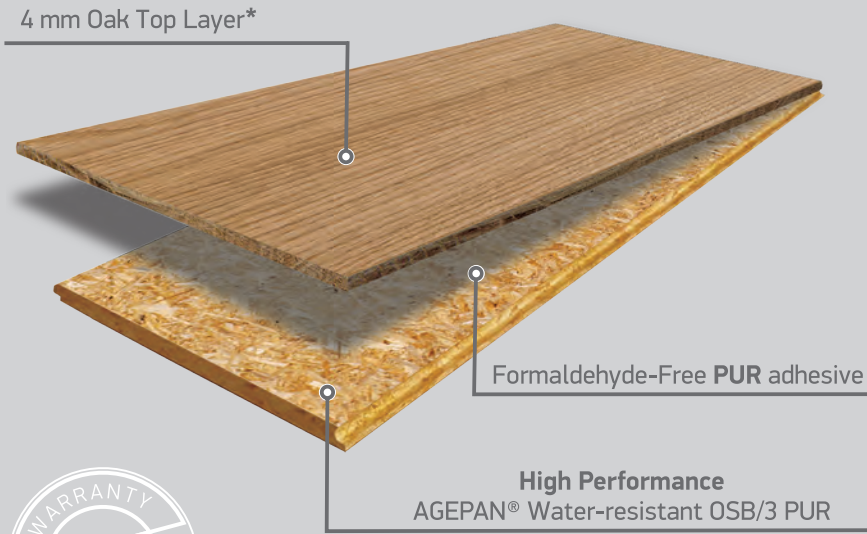

Floorboard Thickness: 14,5 mm

Top Layer (Oak): 4 mm\*

Available Widths: 115 mm / 140 mm / 180 mm

Random Lengths: 850 - 2400 mm

\* Exception: 115 mm width planks - 3 mm thick top layer.



2-LAYER  
FLOORING



FCOH-FREE  
PUR ADHESIVE



RICH COLOR  
PALETTE




COMPATIBLE WITH  
UNDERFLOOR  
HEATING



READY  
TO INSTALL

## 2-LAYER OAK FLOORING on OSB/3 - MODERN ENGINEERED WOOD PRODUCT

- **Installation by glue down method** - glueing whole surface of the board.
- Properly glued 2-Layer Flooring **will feel and sound like a solid flooring.**
- Compatible with underfloor heating systems.
- **Prefinished and ready to install.**

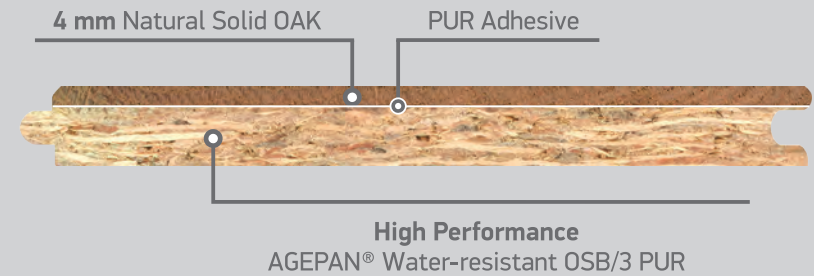

### Base Layer: OSB/3 PUR by AGEPAN® (Germany)

- OSB/3 PUR is a product made of a natural raw material: wood;
- Formaldehyde Free, Class E1 (<0,03 ppm);
- Health Friendly - Food Safety confirmed;
- Absolutely Environmentally Friendly - Green Line OSB/3;

ECOLOGY & ECONOMY